



# FLRC-S/R

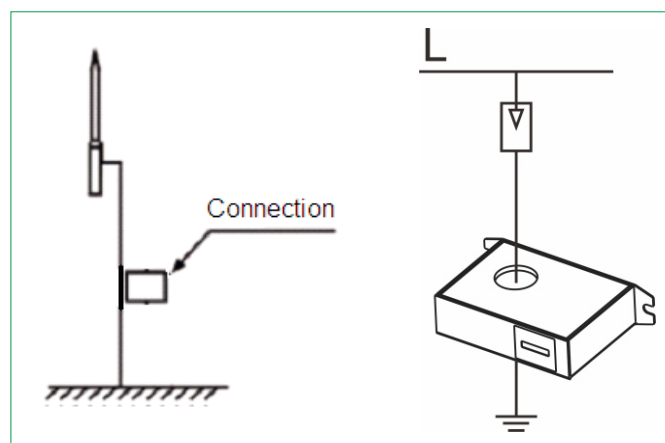

- ◆ Analogue type lightning counter.
- ◆ 4 digits display (0~9999).
- ◆ With reset function by press a button to clear the number to "0".
- ◆ No need battery / power supply.
- ◆ Metal plate. Easy installation and use.
- ◆ Installation window ---30mm.
- ◆ Sensitive response and wide lightning current measuring range.
- ◆ Can be used with all kinds of lightning and surge protectors and equipment.

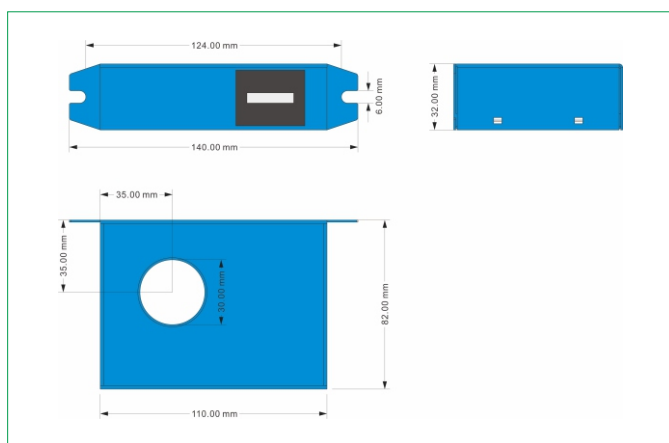

| Model No.  | FLRC-S/R  |
|--|---|
| Minimum Current Sensitivity (rise time $\geq 8\mu s$ ) | >350A   |
| Maximum Detectable Current (Imax)                      | 100kA   |
| Sequence of impulse                                    | > 1s  |
| Display Model  | Electromechanical Counter                       |
| Indicator  | Lightning Event 0~9999                          |
| Reset function   | Press one button to clear display number to "0" |
| Current Sample Mode                                    | Inductive Probe (Built-in)                      |
| Working mode   | No battery / No power supply needed             |
| Operation temperature (°C)                             | -20°C~+70 °C                                    |
| Dimension of installation window (mm)                  | 30mm  |
| Dimension of counter (mm)                              | 110x33x82 mm                                    |
| Enclosure material                                     | Metal plate                                     |
| Net Weight   | 0.46kg  |