


**DC Surge protective device for PV system**  
**Model No.: FV25B+C/3-1000PV**

**Version: B-3**




- **DC surge Protective device** specially used for photovoltaic system less than 1000Vdc.
- The core parts are metal oxide varistor components with high discharge capacity.
- With reliable control thanks to Thermo Dynamic Control disconnecter.
- Without remote signaling contact for control device.
- Fault indication via red mark in the inspection window.


**1.Coding**

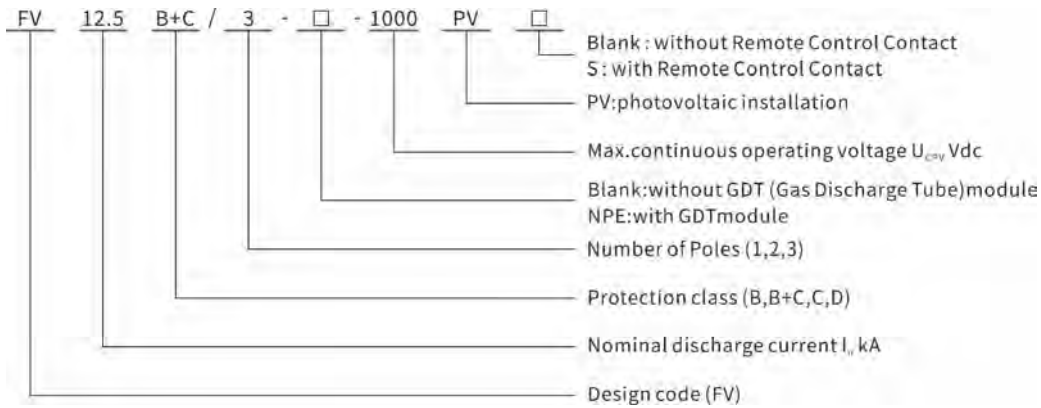

**2. Dimension**

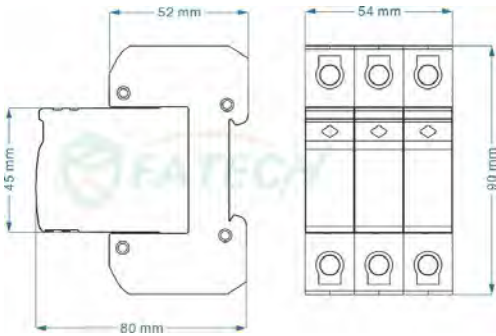

**3. Circuit**

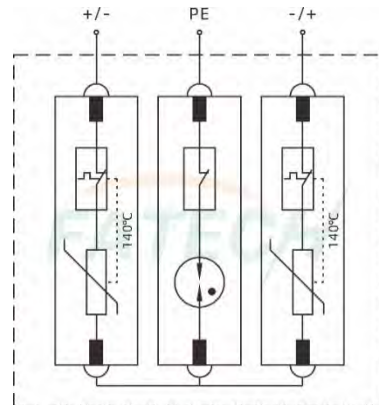

#### 4. Electrical parameters

Model. No.	FV25B + C/3 - 1000PV
SPD protection conforms to EN50539 - 11/IEC61643 - 31	Type 1+2
SPD installation type conforms to EN50539 - 11/IEC61643 - 31	Class I+II
Protection level conforms to DIN VDE0675 - 6	B+C
Type of Network	Photovoltaic systems DC side
Protection mode	(+/-)-PE , (-/+)-PE
Nominal Voltage $U_N$	1000 Vdc
Maximum continuous operating voltage for PV application $U_{OPV}$	1000 Vdc(+/-), 725V(+/PE, -/PE)
Continuous operating current $I_{OPV}$	$\leq 20 \mu\text{A}$
Residual current $I_{R0}$	$\leq 20 \mu\text{A}$ dc $\leq 500 \mu\text{A}$ ac
Standby power consumption $P_c$	$\leq 25$ mVA
Nominal discharge current (8/20 $\mu\text{s}$ ) $I_n$	25 kA
Impuse discharge current (10/350 $\mu\text{s}$ ) $I_{imp}$	6.5 kA
Total Impuse discharge current (10/350 $\mu\text{s}$ ) $I_{total}$	13 kA
Voltage protection level $U_p$	$\leq 4.75$ kV(+/-) $\leq 3.5$ kV(+/PE, -/PE)
Isolation resistance $R_{iso}$	$> 1000$ M $\Omega$
Response time $t_A$	$\leq 25$ ns(+/-) $\leq 100$ ns (+/PE, -/PE)
Remote control contact	NO
Disconnection indicator	Mechanical indicator (Green: OK, Red: Replace)
Minimum area of connecting cable	6 mm <sup>2</sup>
Maximum area of connecting cable	35 mm <sup>2</sup>
Installation location	Inside
Mounting type	35mm DIN rail acc. to EN 60715
Color	Gray
Degree of protection	IP20
Housing material	UL94V-0
Ambient temperature	-40°C – +80°C
Altitude	$\leq 2000$ m (amsl (above mean sea level))
Permissible humidity	30% – 90%